




[Dimensions]

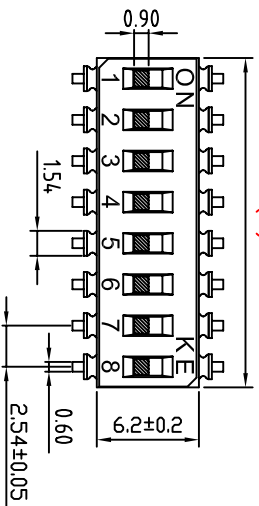


[Schematic]



[推钮行程]

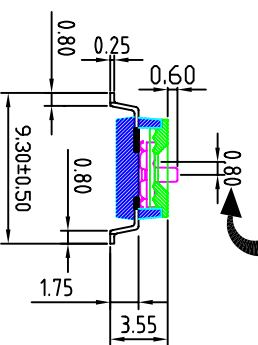


[P.C.B LAYOUT]

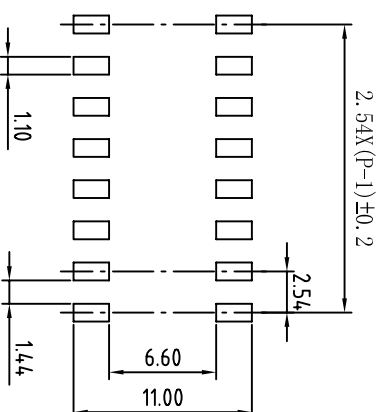

Specification

1. Operating force: 1000g Max
2. Operating Temperature: -30°C to +85°C
3. Storage Temperature: -30°C to +85°C
4. Mechanical Life: 3000cycles minimum

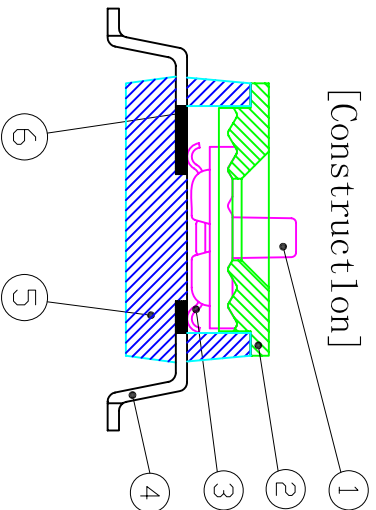

[Construction]

DSIC [XX] (T S S) GET

- [脚型]
- [L=高推 S=低推]
- [T=贴胶 无T=不贴]
- [开关位数]

Number	Part Name	Material	Finished
①	Actuator	UL94 V0	White
②	Cover	UL94 V0	Black
③	Movable	Copper Alloy	3μ" Gold
④	Terminal	Brass	1μ" Gold
⑤	Base	UL94 V0	Black
⑥	Terminal Contact	Brass	3μ" Gold

Drawing

zhu

Date

11/10/24

Remark:

康深电子科技有限公司

Kong Shen Electronic Technology Co., Ltd

Check

Ratio

1:1

Unit

mm

Approved

Unit

mm

Version

新图制成

一般公差

Product

DSIC Series

>0±0.05

P/N

DSIC[XX] (LS) GET

>1±0.2

Drawing No.

2.5±0.3