

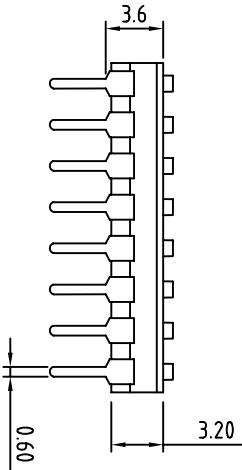



[Dimensions]
(A)

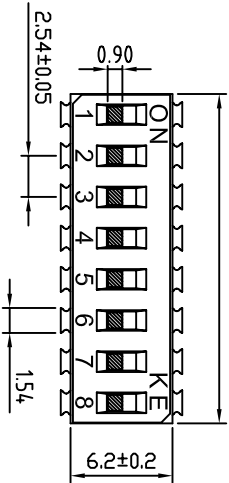


[推钮行程]

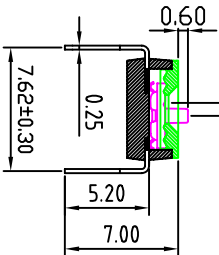


[Schematic]



[P.C.B LAYOUT]

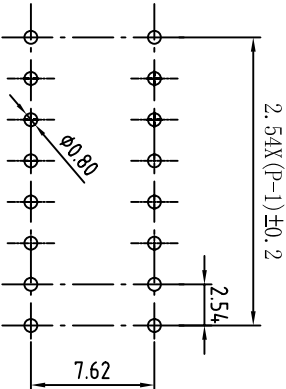

[Construction]

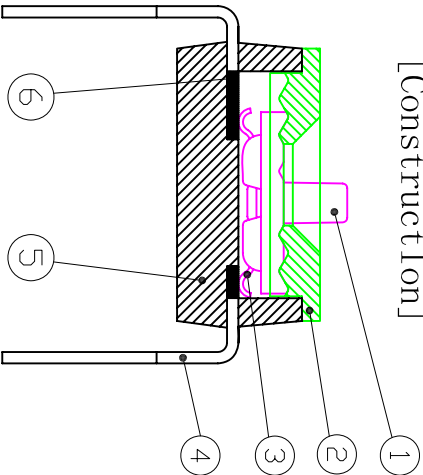

版本 VER	修改内容 ALTERATION	更新日期 DATE

Number	Part Name	Material	Finished
①	Actuator	UL94, V0	White
②	Cover	UL94, V0	Black
③	Movable	Copper Alloy	3μ" Gold
④	Terminal	Brass	1μ" Gold
⑤	Base	UL94, V0	Black
⑥	Terminal Contact	Brass	3μ" Gold

一般公差	Product	DSIC Series
>0±0.05	P/N	DSIC[XX](LH)GET
>1±0.2	Drawing No.	
>25±0.3		

Drawing	zhu	Date	11/10/24	Remark:
Check		Ratio	1:1	
Approved		Unit	mm	
Versions	新图制成			

DSIC[XX](T S H)GET

[脚型]

[L=高推 S=低推]

[T=贴胶 无T=不贴]

[开关位数]

Specification

1. Operating force: 1000gMax

2. Operating Temperature: -30℃ to +85℃

3. Storage Temperature: -30℃ to +85℃

4. Mechanical Life: 3000cycles minimum